


Putty-Pads (UL Electrical Damping and Fire Solution)


Sold 10 Putty Pads per box. Putty Pads are specifically designed to maintain high acoustical ratings in fire rated walls. It is easy to apply and will stay resilient (will not harden). Putty Pads are UL classified for both non-metallic and metallic outlet boxes to prevent the spread of smoke, fire and toxic gases. Putty pads are sized to cover standard size outlet boxes and are designed to work with sound rated wall assemblies.




Wall / Outlet Assembly

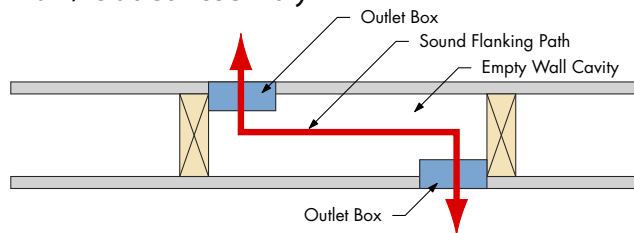

Better Wall / Outlet Assembly

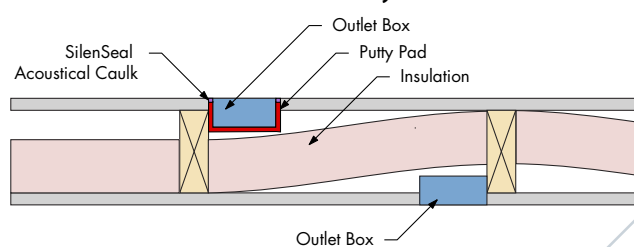

Best Wall / Outlet Assembly

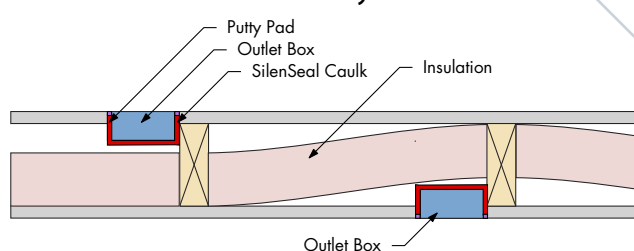

Note that outlets are placed in different wall cavities

Specifications:

Package: 10 pads per box

Thickness: 1/8"

Size: 7.25" by 7.25"

Color: Red

Cure time: none

Application Temp: About 32°F

Flame Spread: 5

Smoke Index: 15

Features:

- UL Rated
- Maintains acoustical ratings per ASTM C 919 and ASTM E 497
- Testing to UL 263 (ASTM E119) and UL 1479 (ASTM E814)
- Outstanding adhesion to outlet boxes and other substrates
- Non-Hardening, permanently resilient
- Water-resistant



Sale & Support: (800) 397-8791
2121 E Stewart Rd. Midland, MI 48640
www.soundproofingcompany.com